

REV.	DESCRIPTION	DATE	DRAFTER	APPROVER
A1	DWG.REL	2020.05.18	LiuZH	JIN






- Material
 - ①Screws : M3.0 steel, Ni plated
 - ②Terminal : Brass, Tin plated
 - ③Housing : PA66,UL94V-0

- Electrical
 - UL IEC
 - Rated voltage : 300V 250V
 - Rated current : 10A 17.5A
 - Contact resistance : 20mΩ(Max)
 - Insulation resistance: 500MΩ/DC500V
 - Withstanding Voltage : AC2000V/1min
 - Wire range: 22-16AWG 1.5mm²

- Mechanical
 - Operating temperature: -40°C~+105°C
 - Soldering temperature:250°C±5/5sec
 - Torque: 0.5N.m (5.11lb.in)
- RoHS compliance

HOW TO ORDER

HB-635T-6.35-XXP-1 X-XXXXX

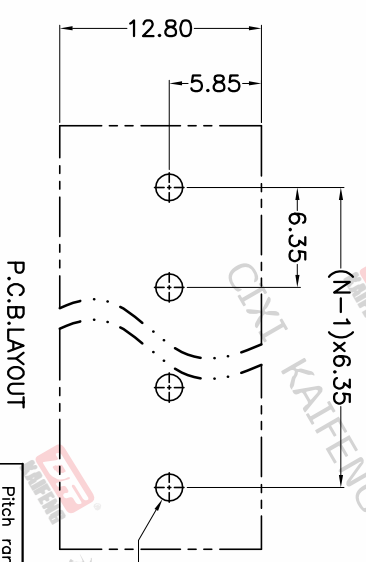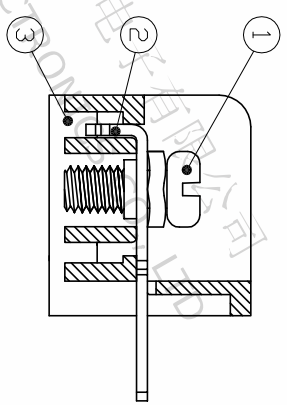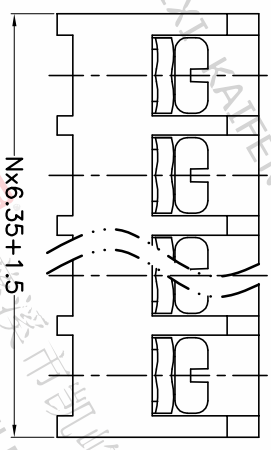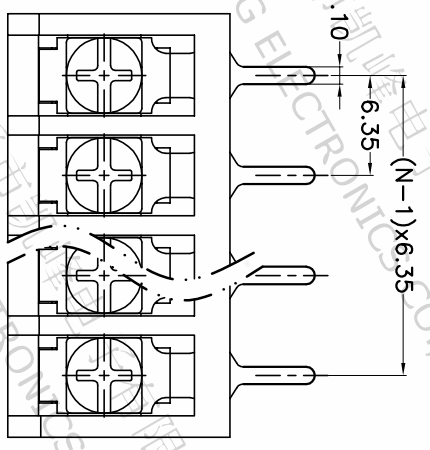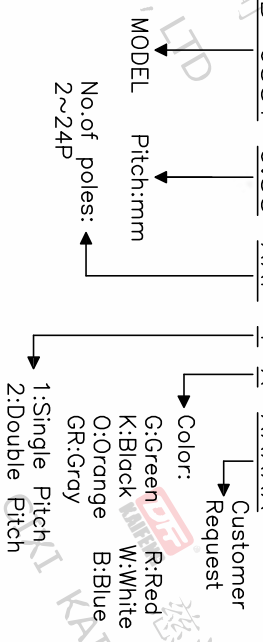

P.C.B.LAYOUT

Pitch range	Nominal dimension range	PROJECTION
>0	>0	0.1/10
>6	>30	0.1/10
~	~	0.1/10
>10	>60	0.1/10
~	~	0.1/10
24	60	0.1/10
30	100	0.1/10
~	~	0.1/10
150	150	0.1/10
~	~	0.1/10
±2°	±1.30	±2°

DRAWING TYPE	CUSTOMER DRAWING
SCALE	1:1
SHEET	1 OF 1
DRAWING NO.	W12000072

DFE 慈溪市凯峰电子有限公司
CIXI KAIFENG ELECTRONICS CO.,LTD

PROJECTION: A4
SHEET SIZE: A4
SERIES: HB-635T
TITLE: HB-635T-6.35-XXP-1X