

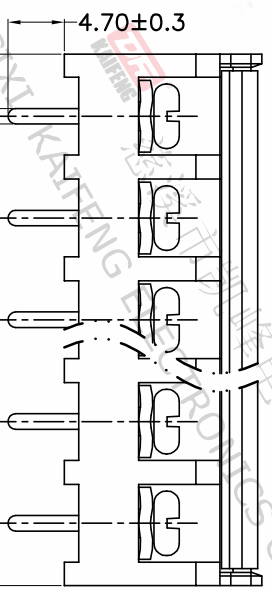





REV.	DESCRIPTION	DATE	DRAFTER	APPROVER
A1	DWG.REL	2020.05.18	LIUZH	JIN

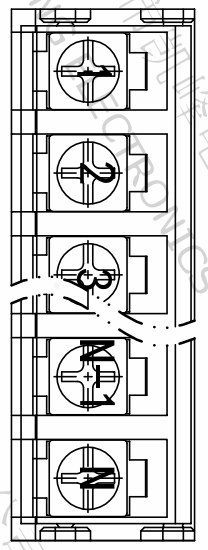

- Material
 - ①Cover : PC
 - ②Screws : M3.5 steel, Ni plated
 - ③Terminal : Brass, Tin plated
 - ④Housing : PA66,UL94V-0
- Electrical
 - UL IEC
 - Rated voltage : 300V 450V
 - Rated current : 20A 24A
 - Contact resistance : 20mΩ(Max)
 - Insulation resistance: 500MΩ/DC500V
 - Withstanding Voltage : AC2000V/1min
 - Wire range: 22-12AWG 2.5mm²
- Mechanical
 - Operating temperature: -40℃~+105℃
 - Soldering temperature:250℃±5/5sec
 - Torque: 0.8N.m (7.02lb.in)
- RoHS compliance

HOW TO ORDER

HB-850M-8.5-XXP-1 X-XXXXX

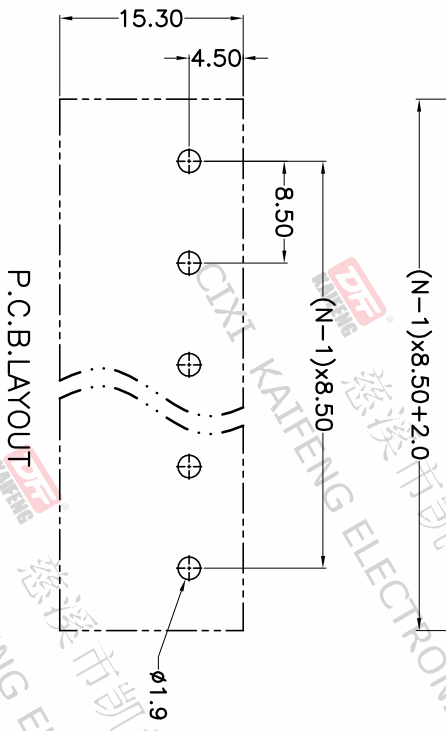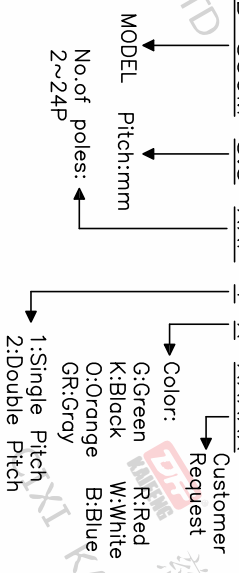

P.C.B. LAYOUT

Pitch range	Nominal dimension range	Projection
>0	>0	0.1/10
~6	~30	≤
~10	~60	±2°
~24	~100	
±0.15	±0.30	
±0.20	±0.50	
±0.30	±0.70	
±0.50	±1.00	
±1.30	±1.30	

DRAWING TYPE	CUSTOMER DRAWING
SCALE	1:1
SHEET	1 OF 1
DRAWING NO.	W12000222

PROJECTION	UNIT	TITLE
1:1	mm	HB-850M-8.5-XXP-1X
A4	A4	SERIES HB-850M

DF 慈溪市凯峰电子有限公司
CIXI KAIFENG ELECTRONICS CO.,LTD

