

REV.	DESCRIPTION	DATE	DRAFTER	APPROVER
A1	DWG.REL	2020/5/18	ZHANG	JIN

- Material  
 @Housing : PA66, UL94V-0  
 @Pin header : Copper alloy, Tin plated

- Electrical  
 Rated voltage : 300V  
 Rated current : 16A







- Contact resistance : 20mΩ(Max)  
 Insulation resistance: 500MΩ/DC500V  
 Withstanding Voltage : AC1500V/1min

- Mechanical  
 Operating temperature: -40°C ~ +105°C  
 Soldering temperature: 250°C ±5/5sec

- RoHS compliance

HOW TO ORDER

HT396R-3.96-XXP-1 X-XXXXX

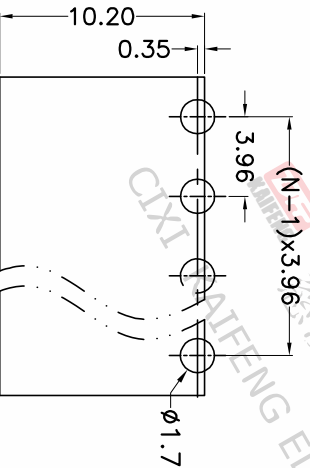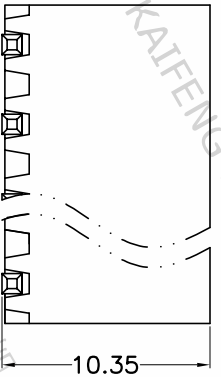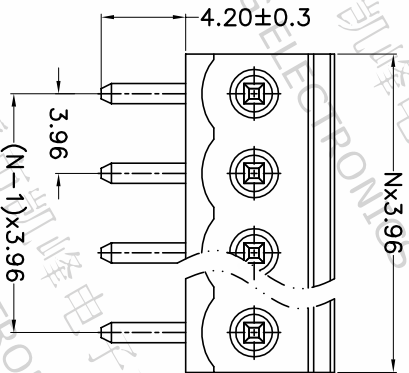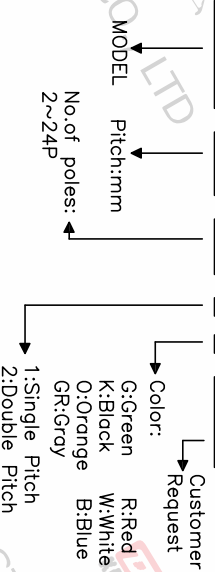

P.C.B.LAYOUT

Pitch range	Nominal dimension	range	0.1/10
>0	>6	>10	>30
~	~	~	~
6	10	24	30
±0.15	±0.20	±0.30	±0.50
			±1.00
			±1.30
			±2

DRAWING TYPE	CUSTOMER DRAWING
SCALE	1:1
DRAWING NO.	W10000032

PROJECTION	UNIT	TITLE
mm	A4	HT396R-3.96-XXP-1X
SHEET SIZE	SERIES	
A4	HT396R	

**DFE**  
 慈溪市凯峰电子有限公司  
 CIXI KAIFENG ELECTRONICS CO.,LTD