
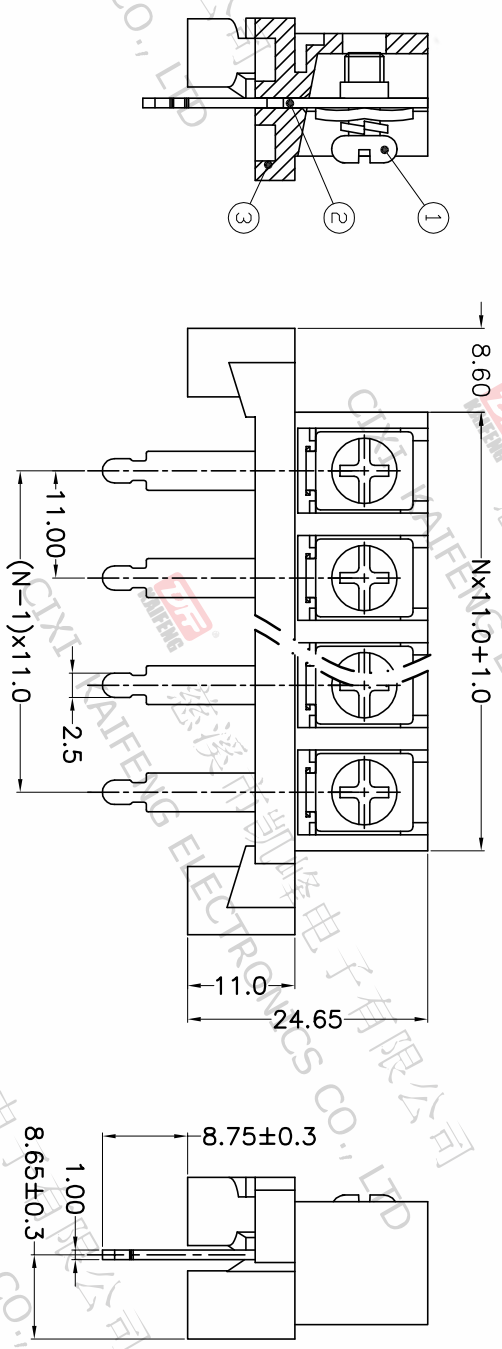


REV.	DESCRIPTION	DATE	DRAFTER	APPROVER
A1	DWG.REL	2020.05.22	LIUZH	JIN

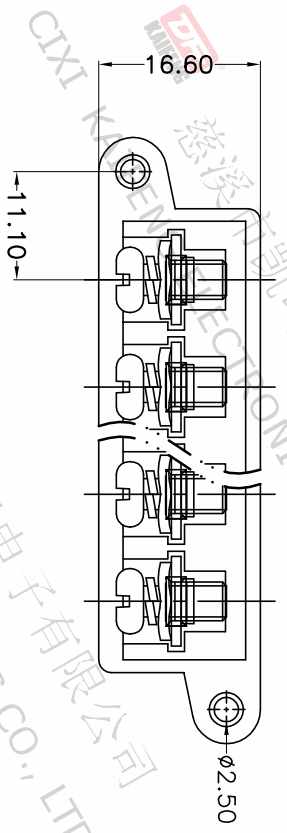


- Material  
 ØScrews : M4.0 steel, Ni plated  
 ØTerminal : Brass, Gold plated  
 ØHousing : PA66,UL94V-0
- Electrical IEC  
 Rated voltage : 300V 250V  
 Rated current : 30A 41A  
 Contact resistance : 20mΩ(Max)  
 Insulation resistance : 500MΩ/DC500V  
 Withstanding Voltage : AC2000V/1min  
 Wire range: 22-10AWG 6.0mm<sup>2</sup>

- Mechanical  
 Operating temperature: -40°C ~ +105°C  
 Soldering temperature: 250°C ±5/5sec  
 Torque: 1.2N.m (10.53lb.in)

• RoHS compliance

HOW TO ORDER

KF-13-11.0-XXP-1 X-XXXXX

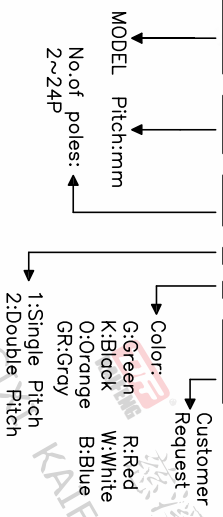

Pitch range	Nominal dimension range	PROJECTION	UNIT
>0	>0	□	mm
~6	~30	□	mm
~10	~60	□	mm
~24	~100	□	mm
~30	~150	□	mm
~60	~1.30	□	mm

DRAWING TYPE	CUSTOMER DRAWING	SHEET SIZE	TITLE
SCALE	1:1	A4	KF-13-11.0-XXP-1X

DRAWING NO.	SHEET	OF
W12001132	1	1

**DF** 慈溪市凯峰电子有限公司  
CIXI KAIFENG ELECTRONICS CO.,LTD