



REV.	DESCRIPTION	DATE	DRAFTER	APPROVER
A1	DWG.REL	2020.6.02	ZHANG	JIN

- Material
 @Housing : PA66, UL94V-0
 @Pin header : Copper alloy, Tin plated
 @Nut : M2.5,Copper alloy

- Electrical
 UL IEC
 Rated voltage : 300V 250V
 Rated current : 8A 7A
 Contact resistance : 20mΩ(Max)
 Insulation resistance: 500MΩ/DC500V
 Withstanding Voltage : AC1500V/1min

- Mechanical
 Operating temperature: -40°C~+105°C
 Soldering temperature:250°C±5/5sec
- RoHS compliance

HOW TO ORDER
 KF2EDGRM-X-3.5-XXP-1 X-XXXXX

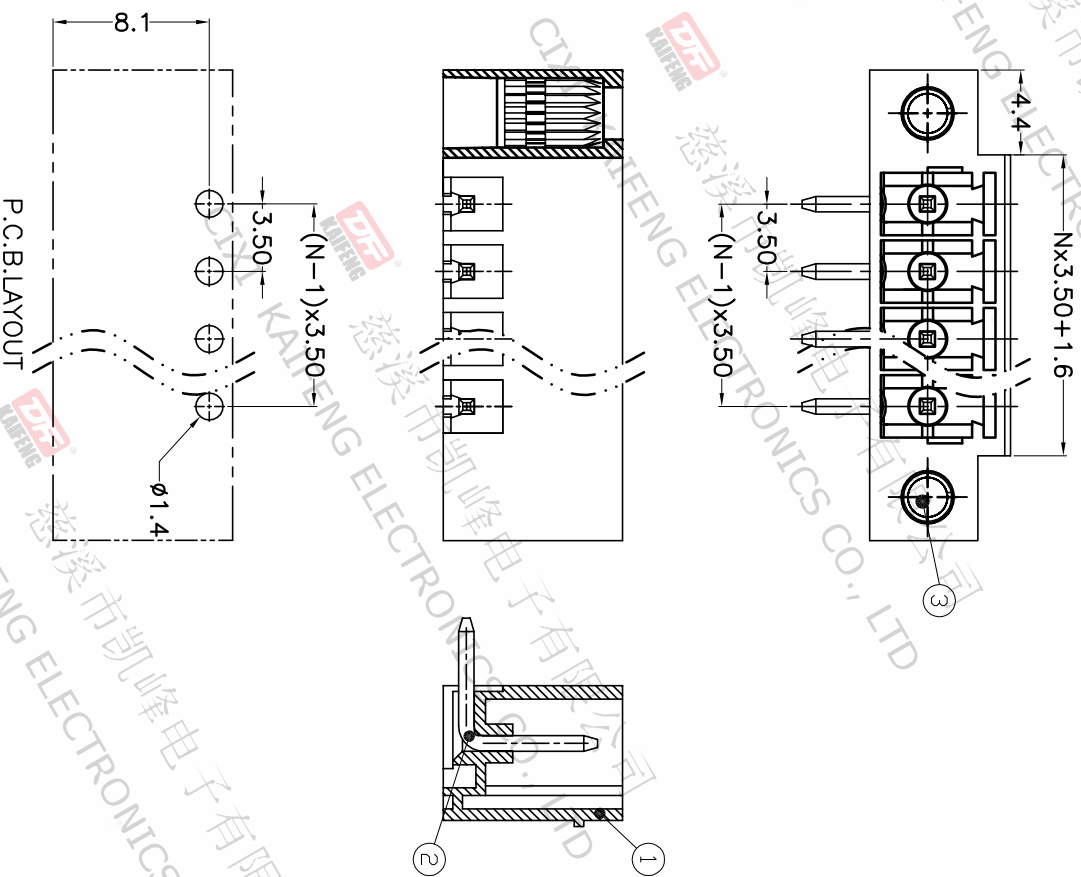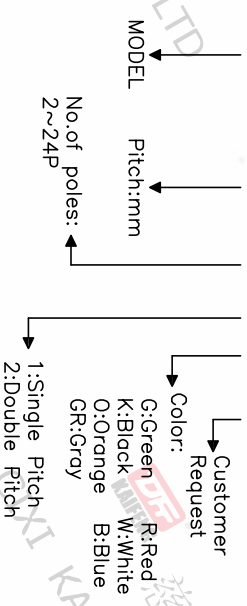

Pitch range	Nominal dimension range	PROJECTION	UNIT
>0	>30	□	mm
~6	~60	□	mm
~10	~100	□	mm
~24	~150	□	mm
±0.15	±0.30	□	±2°

DRAWING TYPE	CUSTOMER DRAWING
SCALE	1:1
DRAWING NO.	W10000722

TITLE	SHEET SIZE	SERIES
KF2EDGRM-Y-3.5-XXP-1X	A4	KF2EDGRM-Y

DF 慈溪市凯峰电子有限公司
 CIXI KAIFENG ELECTRONICS CO.,LTD

