

REV.	DESCRIPTION	DATE	DRAFTER	APPROVER
A1	DWG.REL	2020.06.10	DENG	JIN

- Material
 - ①Housing: PA66, UL94V-0
 - ②Plastic cover: PA66, UL94V-0
 - ③Clip: Copper alloy, Silver plating.
 - ④Reed: Stainless steel

- Electrical

UL	IEC
Rated Voltage: 300V	630V
Rated Current: 15A	16A
Contact Resistance: 20mΩ	
Insulation Resistance: 500MΩ/DC500V	
Withstanding Voltage: AC1500V/1Min	
Wire range: 28-12AWG 0.2-2.5mm ²	







- Mechanical

Temperature Range: -30°C~+105°C
MAX Soldering: +250°C.(5 Seconds)

• RoHS compliance

HOW TO ORDER

KF475A1-7.5-XXP-1 X-XXXXX

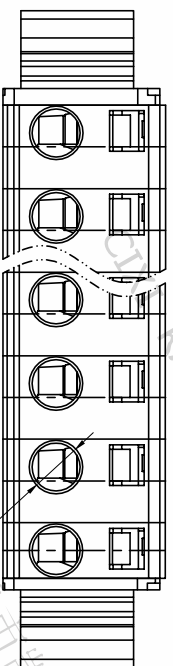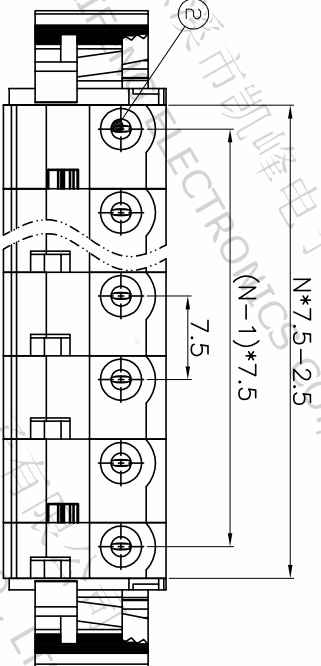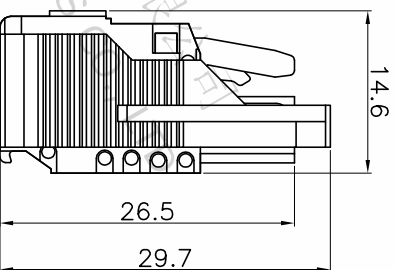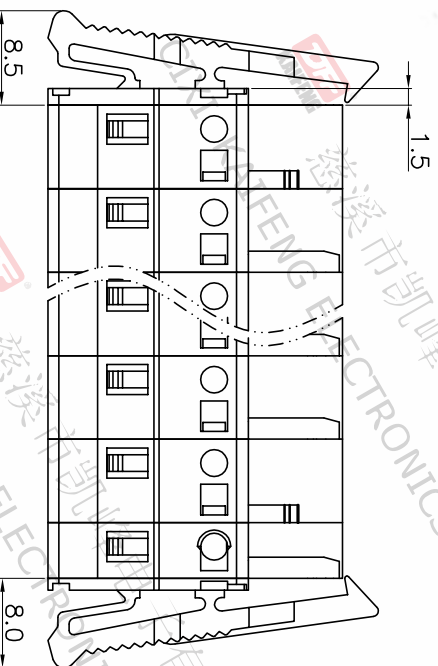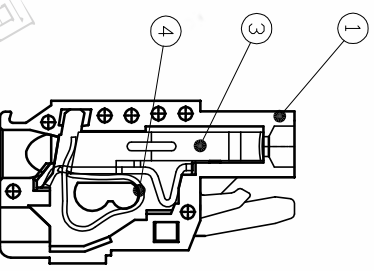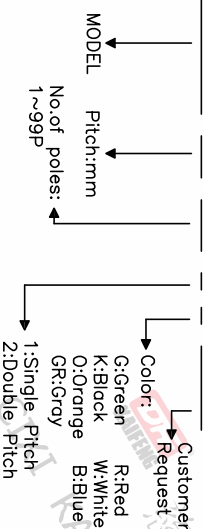

Pitch range	Nominal dimension range	PROJECTION	TITLE
>0	>30	UNIT	KF475A1-7.5-XXP-1X
>6	>60	mm	
>10	>100	A4	
~6	~150	SHEET SIZE	SERIES: KF4751
~10	~150	SHEET	
~24	~150	1 OF 1	
±0.15	±0.30	CUSTOMER DRAWING	
±0.20	±0.30	DRAWING	
±0.30	±0.50	DRAWING NO.	W16000202
±0.70	±1.00		
±1.00	±1.30		
±2'			

DF 慈溪市凯峰电子有限公司
CIXI KAIFENG ELECTRONICS CO.,LTD